

PRODUCT DATASHEET

Confidex Heatwave Flag Printable™



Printable RAIN RFID tag with temperature resistance against automotive paint shop cycle process

ELECTRICAL SPECIFICATION

Device type

RAIN RFID / EPCglobal Gen2v2

Operational frequency

Global 865-928 MHz

IC options and memory configurations

Impinj M780™

- EPC 496 bit; User 128 bit; TID 96 bit

EPC memory content

Unique number encoded


Read range (2W ERP)*

ETSI: Up to 19 m / 62 ft

FCC: Up to 15m / 50 ft

* Read ranges are theoretical values that are calculated for non-reflective environment. Different surface materials may influence performance.

RADIATION PATTERNS

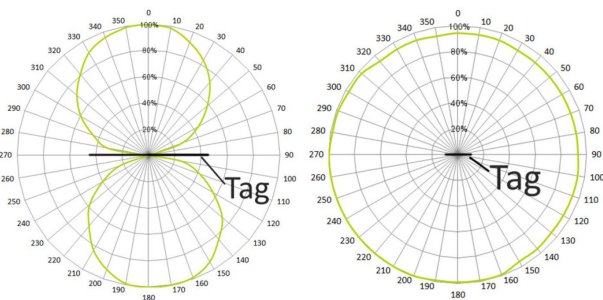

MECHANICAL SPECIFICATION

Tag materials

Special film for high temperatures. No adhesive by default, attached mechanically.

Weight



1 g

Delivery format

On reel. 1500 pcs labels on one reel.

Dimensions

76 x 55,2 x 0,32 mm / 3 x 2.17 x 0.013 in

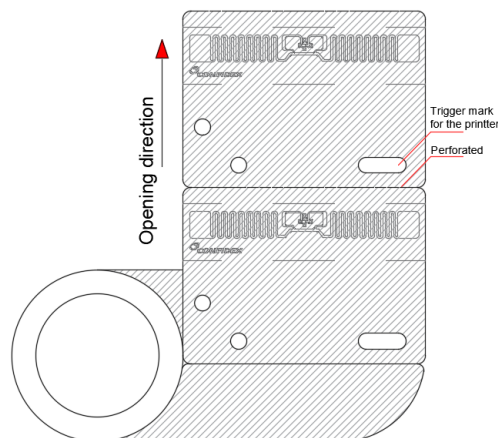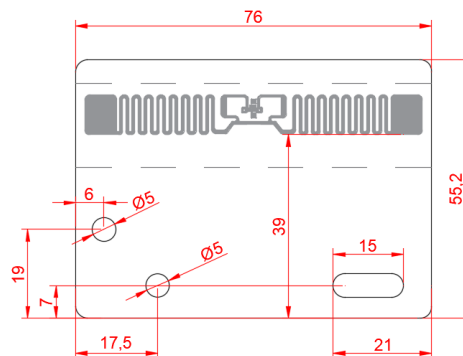

ENVIRONMENTAL RESISTANCE

Operating temperature

-35°C to +85°C / -31°F to +185°F

Peak temperature

1 hour: +220°C / +428°F

10 min: +260°C / +500°F

IP classification

IP68

Bending resistance

Withstands 50mm radius also in high temperatures

Chemical resistance

No physical or performance changes in:

- 168h Motor oil exposure
- 168h Salt water (salinity 10%) exposure
- 10min Sulfuric acid (10%, pH 2) exposure
- 10min NaOH (10%, pH 13) exposure
- 2h Acetone

Resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.

PERSONALIZATION OPTIONS

Pre-encoding

- Customer specific encoding of EPC with or without locking


Visual marking

- Printing of customer specific content

INSTALLATION INSTRUCTIONS

Confidex Heatwave Flag Printable™ can be attached with screws or pop rivets through Ø5mm holes. Tag shall be attached on top of metal so that the antenna part is protruded out from metal as shown in picture below. This will maximize the tag reading distance. Tag will also work when attached on plastic assets.

Polarization of tag is along its longest dimension. This should be taken into account when linear reader antennas are used.

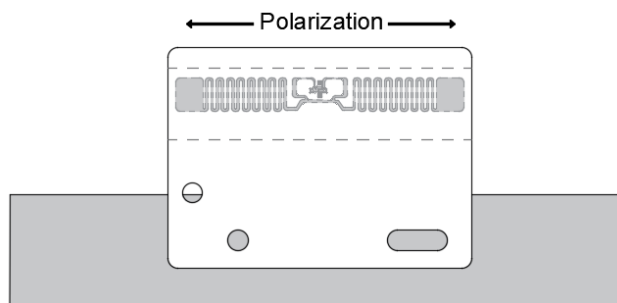

Select the location carefully in a vehicle body or tagged item. Good placement will ensure smooth identification in every stage of manufacturing till the end of assembly line and beyond. Please contact Confidex for further assistance.

ORDER INFORMATION

Product number: 3004238

Product name: Confidex Heatwave Flag™ Printable M780

For additional information and technical support, please contact Confidex Ltd.

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.